


OXYGEN ONLY
OSEL www.opensafety.co.uk
SN: xxxxx
T.P. 120 BAR for 1 minute xx/xx
DUE FOR TEST xx/xx

**LABELLING DETAILS
 PRINTED ON YELLOW PLASTIC
 TO BE POSITIONED APPROPRIATELY
 SO TO ENSURE CLEAR ACCESS)**

Ferrules to be engraved
 - see note 5

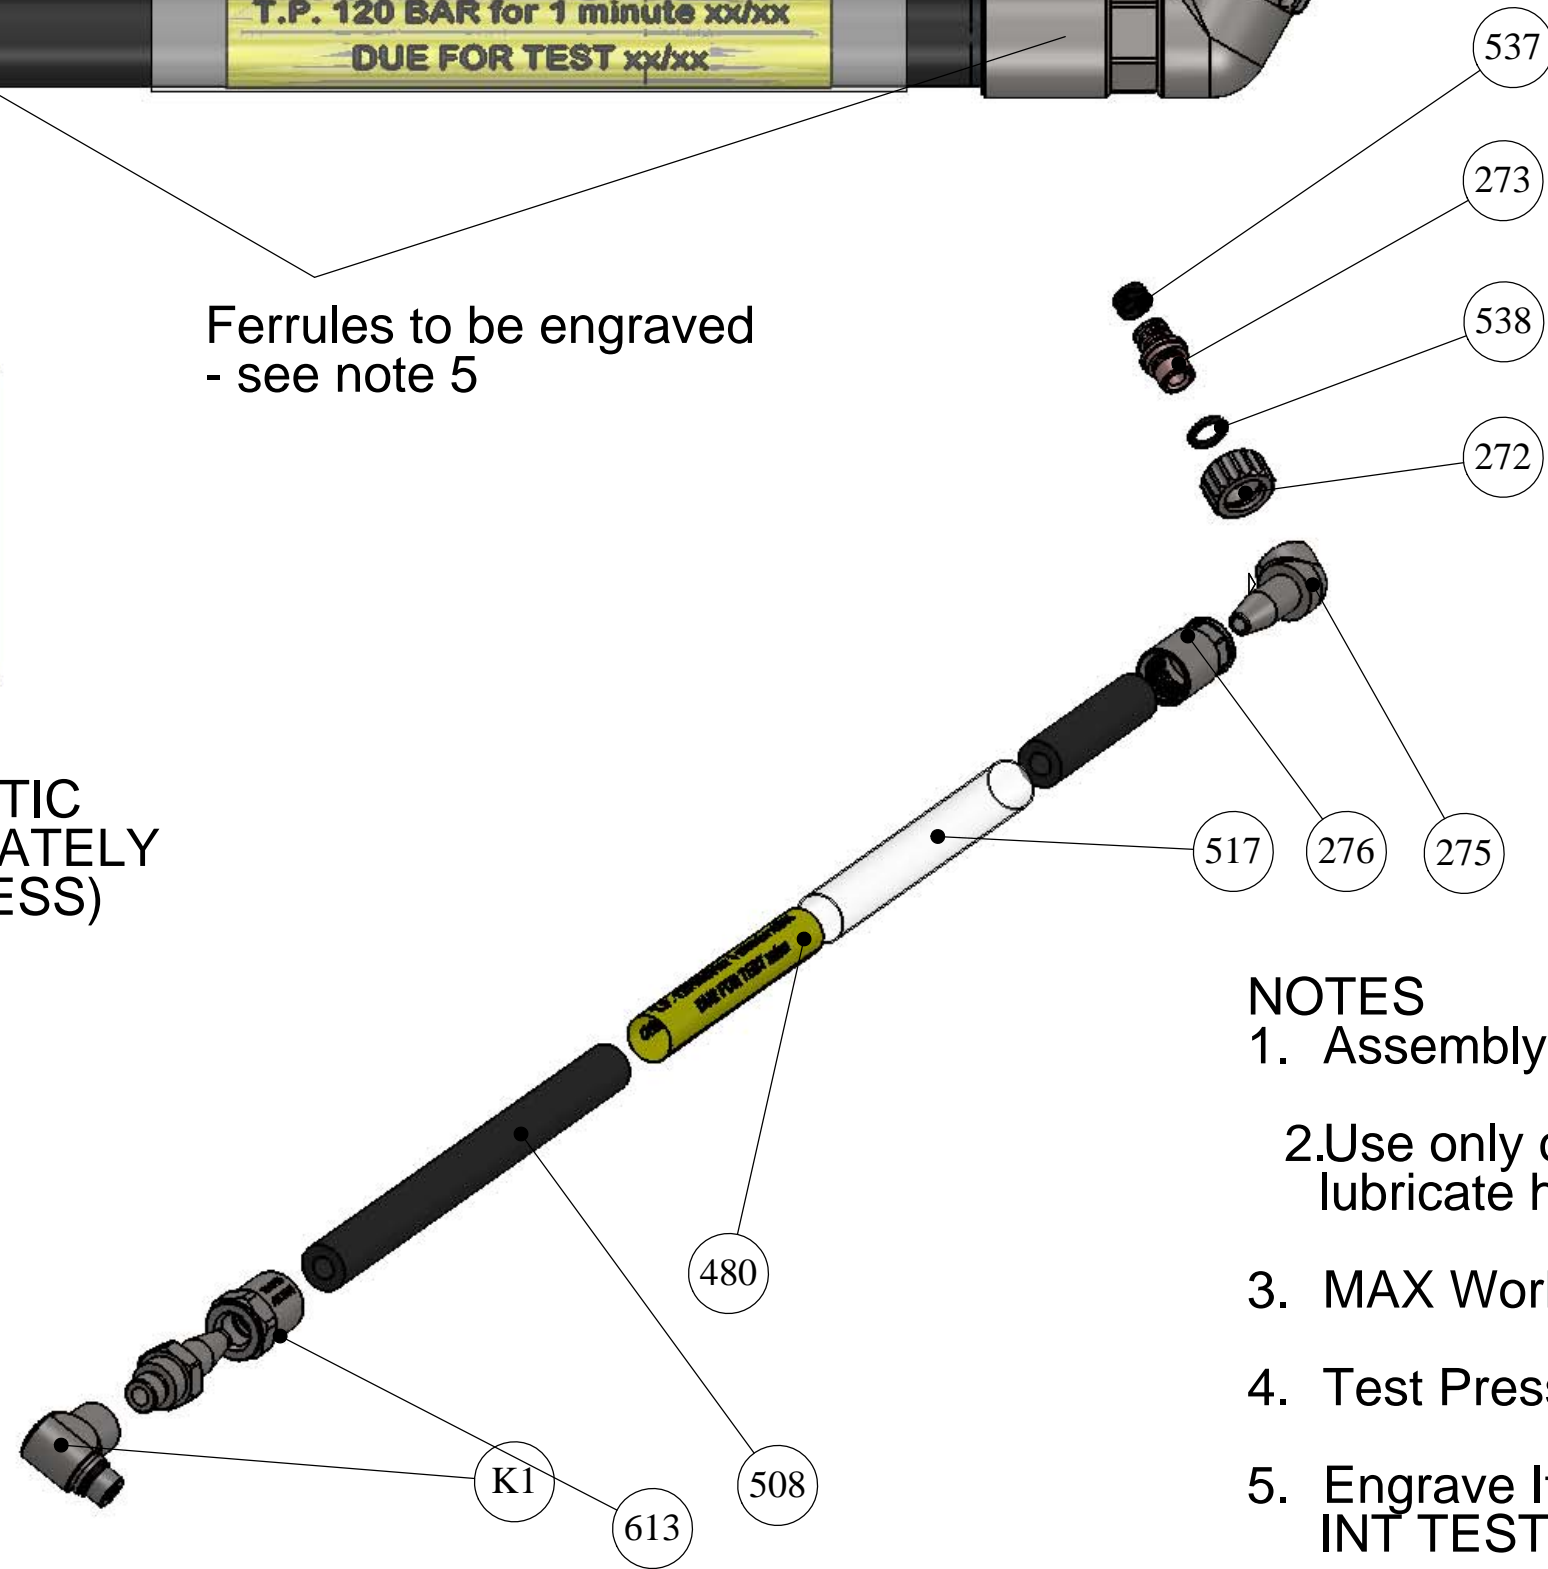

NOTES

1. Assembly to be cleaned for oxygen.
2. Use only oxygen compatible lubricant to lubricate hose' ends while assembling.
3. MAX Working Pressure 18bar.
4. Test Pressure 120bar for 1 minute.
5. Engrave Items: MAX WP 18 BAR, INT TEST xx/xx (MONTH/YEAR).

Item N	Title	Qty
K1	ORS6490 (Assy of Swivel 3/8")	1
272	SRB2-12-1011 (Nut)	1
273	SRB2-12-1012B1 (Insert)	1
275	SRB2-12-1013 (Connector body)	1
276	SRB2-12-1014 (Connector Bush)	1
480	HOSE OXYGEN LABEL	1
508	TPU Hose 1/4" x 1/2" x 800mm	1
517	FEP Label Shrink 100mm	1
537	O-Ring BS010	2
538	O-Ring BS011	1
613	3/8" Hose Fitting	1

Units of measurement	mm, UNLESS OTHERWISE STATED	Mass	Format ISO A4	Designed by A.Kudriashov	Change by	Approved by - date	Filename ORS3800A1.dwg	Date 24.11.09	Scale 1:2
Material				Projection	DEEP LIFE LTD Strictly commercial-in-Confidence copyright (c) 2009. Copying prohibited except as provided for under written contract with Deep Life Ltd.		Title/name Assy of ALVBOV Hose		
Quantity	See BOM						Drawing number	Edition	Sheet(s)
Tolerances	UNLESS OTHERWISE STATED TOLERANCES: H12, h12, ±IT12/2; ANGLE - ±30°						ORS3800	A1	1(2)
Surface roughness	12,5mm MAX ON ALL MACHINED SURFACES UNLESS OTHERWISE STATED								
Surface treatment									